



A brand of Asco Pompe
Screw Pumps



Pompe Svuotafusto



Serie VBE
Drum Pumps



CARATTERISTICHE PRINCIPALI

- Portata max 3 m³/h
- Pressione max 12 bar
- Pulsazioni limitate
- Altamente autoadescante
- Ampia scelta di materiali costruttivi (corpo in ghisa, SS304, SS316, Duplex, ecc).



KEY FEATURES

- Capacity max 3 m³/h
- Pressure max 12 bar
- Stable pump, low pulsation
- High self-priming rate
- Large choice of construction materials (cast iron chassis, SS304, SS316, SS316Ti, Duplex, etc).

PERFORMANCE CURVE 015-1L

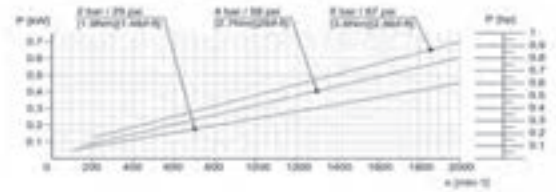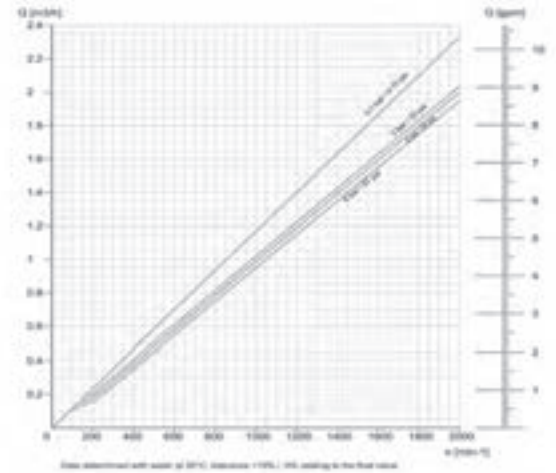

PERFORMANCE CURVE 015-2S

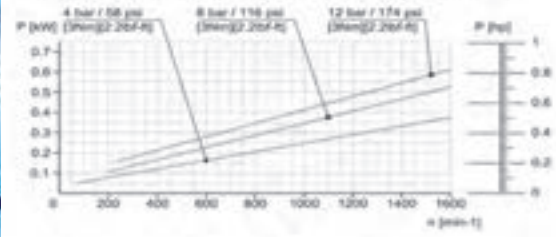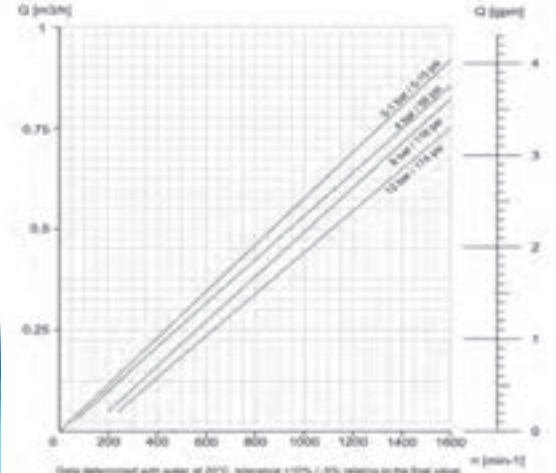

Albero comando flessibile con elevata coppia di spunto.
Flexible high torque drive shaft.




Tolleranze produttive ridotte al minimo e rotore indurito consentono prestazioni costanti e durate molto prolungate nel tempo.
Precision rotor & a durable stator for long service and consistent performance.



Aspirazione appoggiata sul fondo del fusto: minimo spreco e massima efficienza di svuotamento.
Self supporting, low level multi point entry port for efficient empty in little wastage.

Self supporting, low level multi point entry port for efficient empty in little wastage.

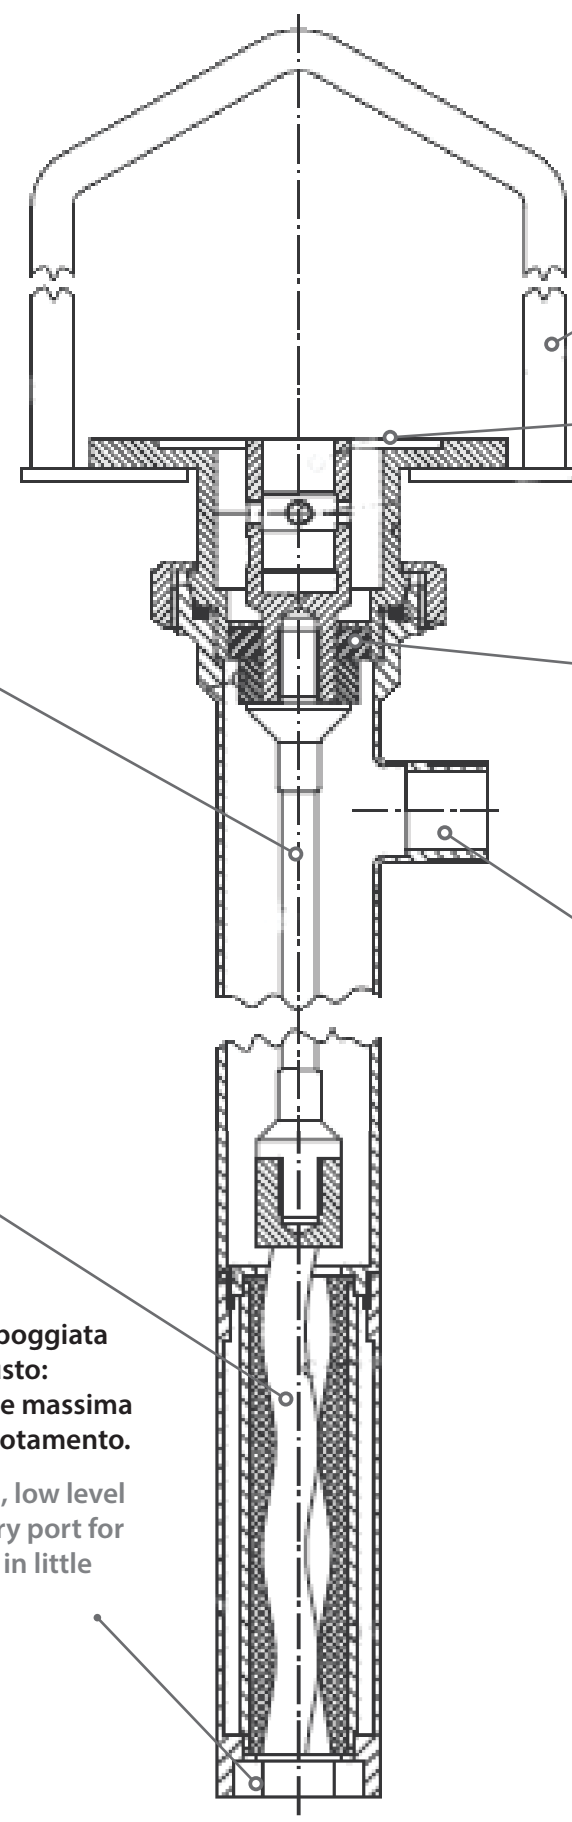

Maniglia di sollevamento
Lifting handle

Montaggio standard internazionale per motori ISO e NEMA.
Standard International motor mounting for ISO & NEMA motors.

Single or 3 Phase rotors available.



Tenuta meccanica singola standard, altre tenute a richiesta.
Single mechanical seal as standard, other sealing options available.

Single mechanical seal as standard, other sealing options available.



Diverse opzioni per la bocca di mandata: attacchi rapidi, BSP, DIN e ANSI.
Various outlet port options including: quick release & Hygienic couplings, BSP, Din and ANSI flanges.

Various outlet port options including: quick release & Hygienic couplings, BSP, Din and ANSI flanges.



PERFORMANCE CURVE 021-1S

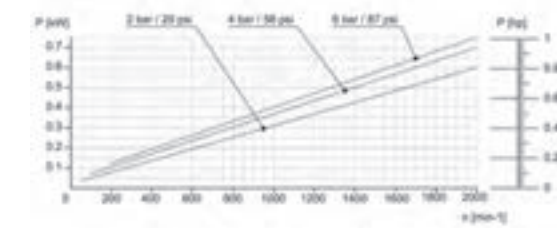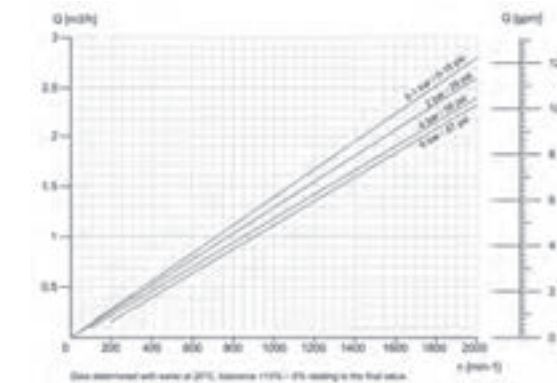

PERFORMANCE CURVE 020-1L

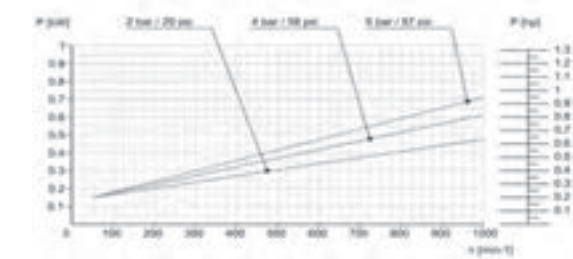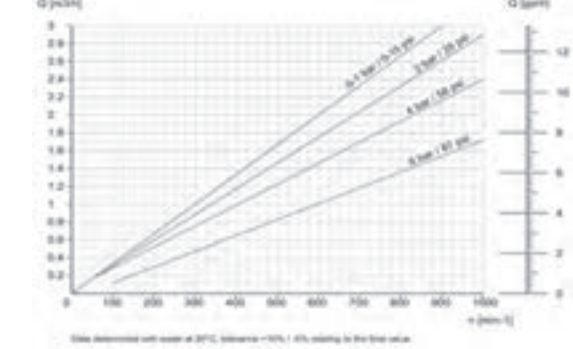

PERFORMANCE CURVE 020-2S

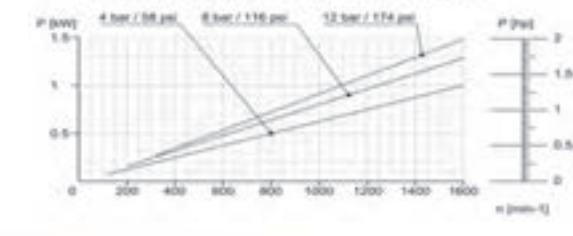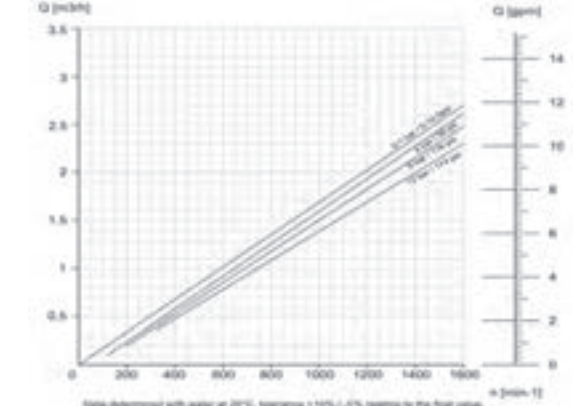



Asco Pompe S.r.l.
Via Silvio Pellico, 6/8
20089 Rozzano (MI) - ITALY
Phone: +39 02 89257.1
Fax: +39 02 89257.201
@: asco@ascopompe.com
www.ascopompe.com

